



LED LAMPS





E27 CLASSIC LED BULB

	POWER (W)	8	10	12	15
	LUMINOUS FLUX (LM)	≥750	≥950	≥1150	≥1450
	EFFICIENCY (LM/W)	≥93	≥95	≥95	≥95
	FREQUENCY (HZ)	50/60	50/60	50/60	50/60
	RATED VOLTAGE	220V / 50Hz	220V / 50Hz	220V / 50Hz	220V / 50Hz
	POWER FACTOR	>0.8	>0.9	>0.9	>0.9
	COLOR RENDERING INDEX RA	>80	>80	>80	>80
	VOLTAGE RANGE	140-250V	100-250V	140-250V	140-250V
	WORKING ENVIRONMENT	-5~+60 °C	-5~+60 °C	-5~+60 °C	-5~+60 °C
	LIFETIME (H)	15,000	30,000	30,000	30,000
	COLOR TEMPERATURE (CCT)	3000-6500k	3000-6500k	3000-6500k	3000-6500k
	WARRANTY	2 years	3 years	3 years	3 years


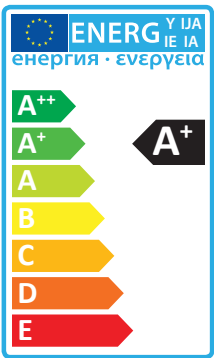


SIZE	A60	A65	A65	A70
BASE TYPE	E27	E27	E27	E27
DIMENSIONS (MM)	113X65	126X65	128X65	128X65



E14 LED CANDLE

	POWER (W)	6
	LUMINOUS FLUX (LM)	≥570
	EFFICIENCY (LM/W)	≥95
	FREQUENCY (HZ)	50/60
	RATED VOLTAGE	220V / 50Hz
	POWER FACTOR	> 0.9
	COLOR RENDERING INDEX RA	> 80
	VOLTAGE RANGE	100-250V
	WORKING ENVIRONMENT	-5~+60 °C
	LIFETIME (H)	30,000
	COLOR TEMPERATURE (CCT)	3000-6500k
WARRANTY	3 years	

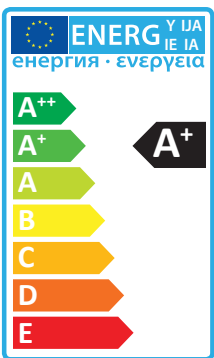

SIZE	C37 and C35
BASE TYPE	E14
DIMENSION(MM)	30X50



MR16 LED		
	POWER (W)	4.5
	LUMINOUS FLUX (LM)	≥340
	EFFICIENCY (LM/W)	≥95
	FREQUENCY (HZ)	50/60
	RATED VOLTAGE	220V / 50Hz
	POWER FACTOR	>0.5
	COLOR RENDERING INDEX RA	>80
	VOLTAGE RANGE	100-250V
	WORKING ENVIRONMENT	-5~+60 °C
	LIFETIME (H)	30,000
	COLOR TEMPERATURE (CCT)	3000-6500k
	WARRANTY	3 years
	SIZE	MR16
	BASE TYPE	GU5.3
	DIMENSION(MM)	50X50
		

T8 LED TUBE				
		POWER (W)	9	18
		LUMINOUS FLUX (LM)	≥900	≥1800
		EFFICIENCY (LM/W)	>100	>100
		FREQUENCY(HZ)	50/60	50/60
		RATED VOLTAGE	220V / 50Hz	220V / 50Hz
		POWER FACTOR	≥0.95	≥0.95
		COLOR RENDERING INDEX RA	>80	>80
		VOLTAGE RANGE	100-270 V	100-270 V
		WORKING ENVIRONMENT	-5~+60 °C	-5~+60 °C
		LIFETIME (H)	30,000	30,000
		COLOR TEMPERATURE (CCT)	3000-6500k	3000-6500k
		WARRANTY	3 years	3 years
LENGTH	60 cm	120 cm		
BASE TYPE	G13	G13		
				